

REZNOR®


Unit Heaters

VR Series Low Intensity Infra-Red

Model #	Heating Input BTUH (Kw)	Number of 10 feet (3m) Tubes	Voltage/ Phase	Approximate Shipping Weight lbs (kg)
50-20	50,000 (14.7)	2	115/1	125 (56.7)
50-30	50,000 (14.7)	3	115/1	161 (73.0)
50-40	50,000 (14.7)	4	115/1	255 (116.0)
75-20	75,000 (22.0)	2	115/1	125 (56.7)
75-30	75,000 (22.0)	3	115/1	161 (73.0)
75-40	75,000 (22.0)	4	115/1	200 (90.7)
100-30	100,000 (29.3)	3	115/1	161 (73.0)
100-40	100,000 (29.3)	4	115/1	200 (90.7)
100-50	100,000 (29.3)	5	115/1	236 (107.0)
125-30	125,000 (36.6)	3	115/1	186 (84.0)
125-40	125,000 (36.6)	4	115/1	200 (90.7)
125-50	125,000 (36.6)	5	115/1	236 (107.0)
125-60	125,000 (36.6)	6	115/1	326 (148.0)
150-40	150,000 (44.0)	4	115/1	255 (116.0)
150-50	150,000 (44.0)	5	115/1	236 (107.0)
150-60	150,000 (44.0)	6	115/1	275 (124.7)
175-40	175,000 (51.3)	4	115/1	255 (116.0)
175-50	175,000 (51.3)	5	115/1	236 (107.0)
175-60	175,000 (51.3)	6	115/1	275 (124.7)
175-70	175,000 (51.3)	7	115/1	311 (141.1)
200-50	200,000 (58.6)	5	115/1	236 (107.0)
200-60	200,000 (58.6)	6	115/1	275 (124.7)
200-70	200,000 (58.6)	7	115/1	311 (141.1)

Natural gas operation, multi-try direct ignition with 100% lockout, single-stage combination gas valve, pre-purge and post purge, differential air pressure switch, diagnostic indicator light, sight glass for observation, external terminal board connection for 24-volt thermostat, grounded plug-in cord, 16-gauge aluminized steel combustion chamber, high emissivity radiant tubes, compression coupling tube connections, wire form hangers, polished aluminum reflectors, aluminized steel flue gas turbulators for maximum efficiency, horizontal or vertical venting, painted cabinet.

Accessories	Description
AA2	Propane Gas
AH3	Spark Ignition with Timed Lockout
CD13 - 20	Side Shields
CD27	Reflector Gap Covers
CK11	Hanger Kit
CK12 - 18	Turnbuckle Kits
DE2	Combination Air Inlet Kits

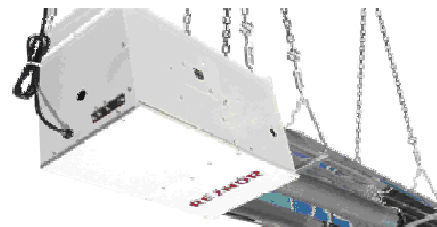

Warranty Information

For the original owner-user, the Reznor unit will be free from defects in materials or workmanship. This warranty is limited to twelve (12) months from the date of the original installation, whether or not actual use begins on that date or eighteen (18) months from date of shipment by Reznor, whichever comes first. Extended nine (9) year, non-prorated, limited warranty on all tubes. Extended four (4) year, non-prorated, limited warranty on the burner and all electrical and mechanical operating components.

